




LM-SKS

The LM-SKS is purpose-built for Springlok 700 roof profiles, featuring a dual-position leg to accommodate both wider and narrower crest widths. Its thoughtful design ensures a secure, stable fit across a range of roof variations.

Application	<ul style="list-style-type: none"> • Springlok 700 (youngman) • Saflok 700 (Safintra) • Klip-lok 700 (GRS) • Similar roof types
Key Features	<ul style="list-style-type: none"> • Attach to popular concealed fix metal roofs without sheet penetration • Over-torque preventing spacers are available • Dual-position arm positions to accommodate various profiles • Compatible with grounding washers, mid- and end clamps • Single tool fastening – groove prevents the nut from turning along while tensioning the bolts
Material	Aluminium 6005-T5, Stainless Steel SUS304
Specifications	Anodised > 13 µm
Dimensions	H 93.2 mm x L 80 mm x W 47.5 mm
Total Weight	300 g (including fasteners)
Orientation	Landscape
Product Type	Concealed fix

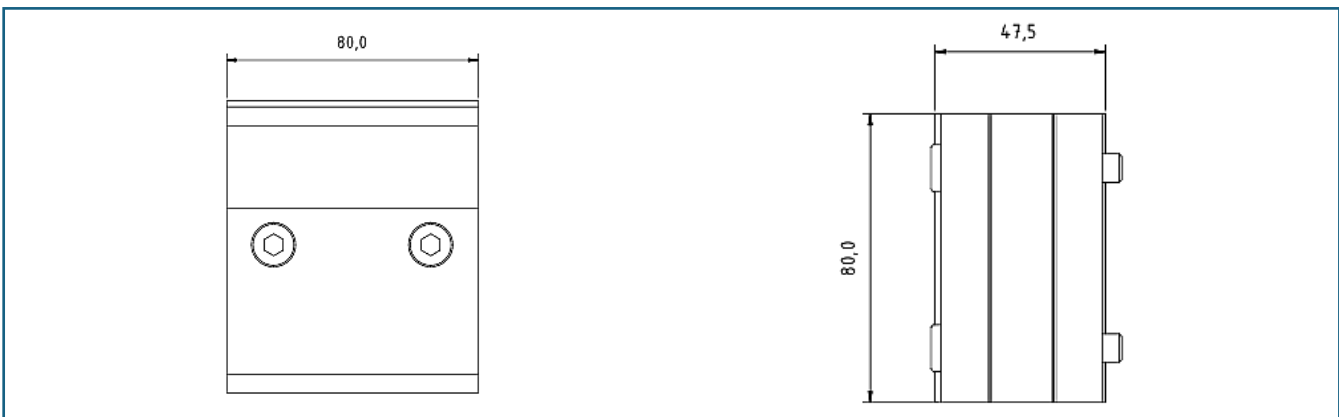

Versatile

The LM-SKS's versatility allows it to work with most Klip-Lok type profiles, making it a flexible solution for various roofing applications



Robust

The LM-SKS is constructed from materials that combine durability with strength, while the spacers are made from AL 6063 T6 for added robustness.