



# HANGER-BOLT FS-HBS-M8X136



## High-Strength M8 Hanger Bolt


This SS304 stainless steel bolt offers high-strength installations with precise threading for reliable support.

Application	Substructure fix - steel substructures
Key Features	<ul style="list-style-type: none"> <li>• <b>Water resistant design with rubber grommet</b> - The integrated rubber grommet seals tightly, preventing water entry into the installation area</li> <li>• <b>Secure and reliable with lock nut</b> - The included lock nut keeps the hanger bolt securely fastened, even with vibration or movement</li> <li>• <b>Complete assembly with flat washers</b> - The hanger bolt includes flat washers, providing a ready-to-use assembly</li> <li>• <b>Improved performance with fluted tip</b> - The fluted tip guides the bolt into the pre-drilled holes for easy installation</li> </ul>
Material	Stainless steel SUS304
Pre - Drill Diameter	Ø 6.8 mm for 1.5 < 5.0 mm steel
Total Weight	81.5 g
Total Length	136 mm (Can differ in length due to tolerances)
Screw Thread Length (M8)	80 ± 1 mm
Machine Thread Length (M10)	50 ± 1 mm
Diameter	M10 / 8
Head Type	Allen Key (Hex Socket) 5 mm

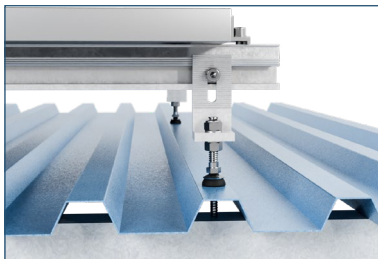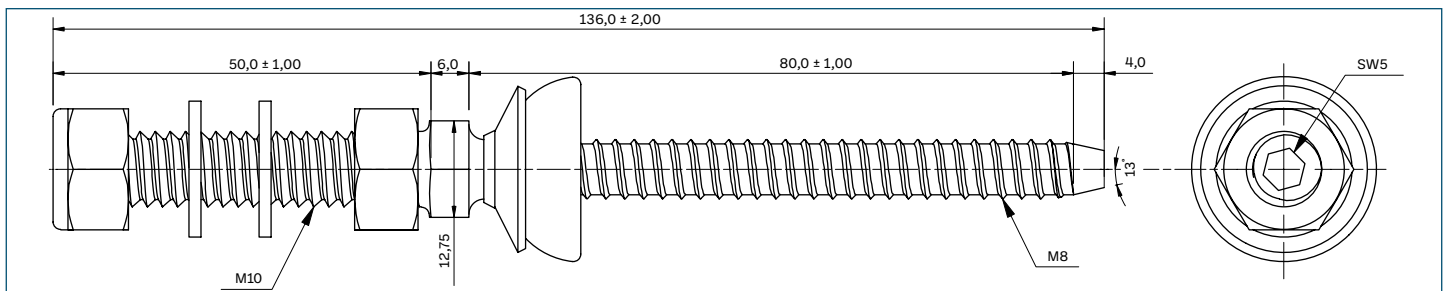

### Reliable and Strong

Designed for high-strength applications and provides secure and stable installations. Its precise threading ensures a tight, reliable fit, making it ideal for various structural uses where durability and performance are essential.

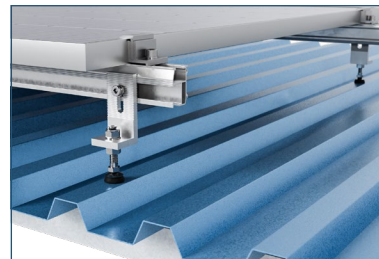

### Versatile and Easy to Use

The M8 Hanger Bolt's 136 mm length and compatibility with various fasteners make it easy to incorporate into different projects, offering reliable support for both residential and commercial applications.